



Casing Head Assembly

- Working pressure: 2,000 psi ~ 20,000psi
- Nominal size: 7 1/16" ~ 21 1/4"
- Working temperature: -46 °C ~ 121 °C (LU)
- Material class: AA, BB, CC, DD, EE, FF, HH
- Product specification level: PSL1, PSL2, PSL3, PSL3G, PSL4
- Bottom connection: Welded, screw or slip
- Side outlet type: Flange or threaded

- Designed with VR thread joint.
- Body inner bore designed with high performance load shoulder.
- Two kinds of secondary seal: seal energized by grease injection and seal energized without grease injection.
- The secondary seal can be used for metal to metal

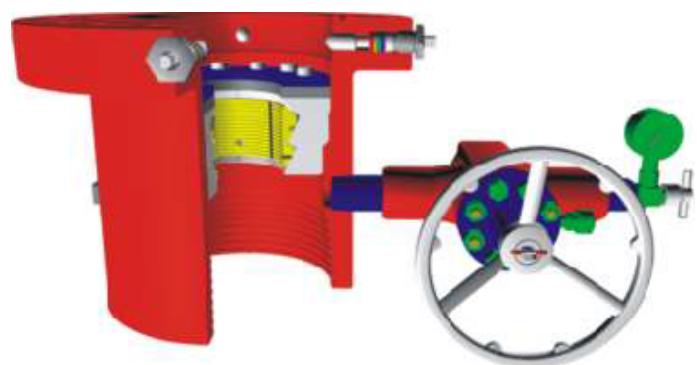

Threaded Bottom Connection Casing Head

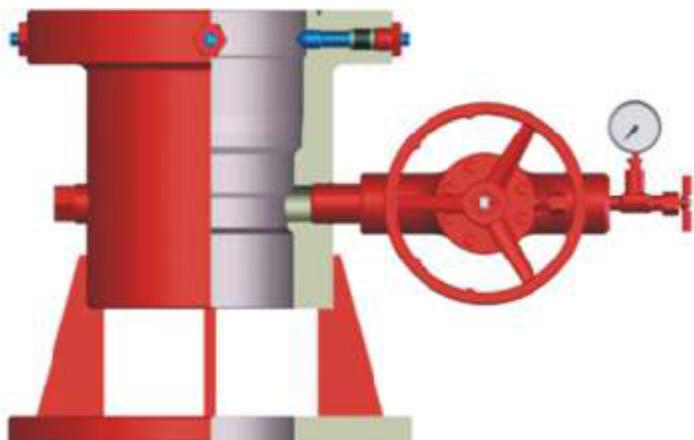

Welded Bottom Connection Casing Head



Slip Bottom Connection Casing Head

Casing Head Tool



Running & Retrieving Tool



Wearing Bushing



Multi-Functional Test Plug